

## MANUAL





## Table of contents

Warning Safety Instructions Return Procedure Claims	
Description of the device	
Description of the device Frontside	4
Set Up and Operation	5
Maintenance	6
Fabric cleaning Precautions Safety guard instruction	6
Precautions	6
Safety guard instruction	6
Product Specifications	6



## Warning



For your own safety, please read this user manual carefully before your initial start-up!



#### **Unpacking Instructions**

Immediately upon receiving this product, carefully unpack the carton and check the contents to ensure that all parts are present, and have been received in good condition. Notify the dealer immediately and retain packing material for inspection if any parts appear damaged from shipping or the carton itself shows signs of mishandling. Save the carton and all packing materials. In the event that a fixture must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.

#### Your shipment includes:

- DMT Tripo Screen 100
- User manual





CAUTION! Keep this device away from rain and moisture! Unplug mains lead before opening the housing!



#### **Safety Instructions**

Every person involved with the installation, operation and maintenance of this device has to:

- be qualified
- follow the instructions of this manual

Before the initial start-up, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the device.

To maintain perfect condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes contained in this manual.

Please consider that damages caused by manual modifications to the device are not subject to warranty.

This device contains no user-serviceable parts. Refer servicing to qualified technicians only.

#### **IMPORTANT:**

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the device.



- Never remove warning or informative labels from the unit.
- Never leave any cables lying around.
- Do not shake the device. Avoid brute force when installing or operating the device.
- Only use the device indoors, avoid contact with water or other liquids.
- Avoid flames and do not put close to flammable liquids or gases.
- Make sure that the device is not exposed to extreme heat, moisture or dust.
- If device was dropped or struck, have a qualified engineer inspect for safety before operating.
- If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.
- If your DMT device fails to work properly, discontinue the use immediately. Pack the unit securely (preferably in the original packing material), and return it to your DMT dealer for service.
- The user is responsible for correct positioning and operating of the Tripod screen. The manufacturer will not accept liability for damages caused by the misuse or incorrect installation of this device.
- Repairs, servicing and electric connection must be carried out by a qualified technician.
- WARRANTY: Till one year after date of purchase.

#### Improper installation can cause serious injuries and/or damage of property!



## 🛕 🛛 Return Procedure 🖊

Returned merchandise must be sent prepaid and in the original packing, call tags will not be issued. Package must be clearly labeled with a Return Authorization Number (RMA number). Products returned without an RMA number will be refused. Highlite will not accept the returned goods or any responsibility. Call Highlite 0031-455667723 or mail <u>aftersales@highlite.nl</u> and request an RMA prior to shipping the fixture. Be prepared to provide the model number, serial number and a brief description of the cause for the return. Be sure to properly pack fixture, any shipping damage resulting from inadequate packaging is the customer's responsibility. Highlite reserves the right to use its own discretion to repair or replace product(s). As a suggestion, proper UPS packing or double-boxing is always a safe method to use.

# Note: If you are given an RMA number, please include the following information on a piece of paper inside the box:

- 01) Your name
- 02) Your address
- 03) Your phone number
- 04) A brief description of the symptoms

#### Claims

The client has the obligation to check the delivered goods immediately upon delivery for any shortcomings and/or visible defects, or perform this check after our announcement that the goods are at their disposal. Damage incurred in shipping is the responsibility of the shipper; therefore the damage must be reported to the carrier upon receipt of merchandise.

It is the customer's responsibility to report and submit claims with the shipper in the event that a fixture is damaged due to shipping. Transportation damage has to be reported to us within one day after receipt of the delivery.

Any return shipment has to be made post-paid at all times. Return shipments must be accompanied with a letter defining the reason for return shipment. Non-prepaid return shipments will be refused, unless agreed otherwise in writing.

Complaints against us must be prepared in writing or sent by fax within 10 working days after receipt of the invoice. After this period complaints will not be handled anymore.

Complaints will only then be considered if the client has so far complied with all parts of the agreement, regardless of the agreement from which the obligation is resulting.



## Description of the device

#### Features

The Tripod Screen 100" Screen

- Simplicity design, rugged components and carefull workmanship.
- Heavy duty aluminium combined with steel parts, light structure, portable
- Plastic finished parts, elegant appearance
- Easy operation, stable uphold
- In the junction of self-locking parts, adopted is the design of steel parts welded into plastic parts, which minimizes any scratches on the post
- The surface has the characteristic of flame retardant and mildew resistant
- Durable enough for daily use without colour fading or deformation and it is still staying flat for optimum image quality
- Tripods for fixed standing
- Black aluminium tripod with fine finished, modern appearance
- Easy setup and adjustement, a pleasure to use
- Suspension slot saddle keeps the viewing surface perfectly flat
- Both case and upper shaft are easily adjustable
- Black masking border to assure best quality video image
- More stable and sturdy aluminium legs bear cruel usage
- Built-in metal keystone eliminator extends 10" invisible when not in use
- Surface: Matt white
- Gain: 1,1
- Viewing angle: 50°
- Diagonal size: 100"
- Screen size (WxH): 211 x 160 cm
- Viewing area (WxH): 203 x 152 cm
- Weight: 12 kg

#### Frontside











Keystone eliminator



Handle

Fig. 01

Fig. 02



### **Tripod Screen 100**



Fig. 03


Item No	Screen Size	Viewing Area	Weight
100371	211 x 160 cm	203 x 152 cm	12,00 Kg
100370	176 x 133 cm	171 x 128 cm	10,50 Kg


## Set Up and Operation

- Please open the screen: sequence of opening step 1-2-3-4-5. •

insert

Repeat step 2-3-2 to adjust the screen height. Repeat step 4-5-4 to adjust the screen's lowest position. •

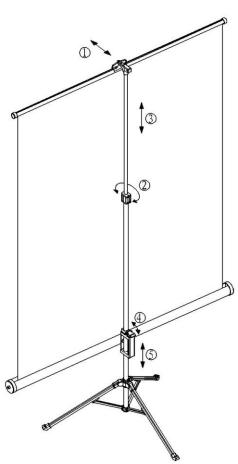







## Maintenance

#### Fabric cleaning

Matte white fabric: washable with soft soap and warm water

please do not use alcohol or other liquids to wash the screen, this will degenerate the fabric



#### Precautions

- Do not scratch or fold up the screen fabric.
- After usage, please roll the fabric back into the case. Before rolling up, please check again there are no foreign objectives on the screen surface.
- When opening and/or closing the tripod, please do this carefully take care, and not sudden crack to avoid break up the plastic parts

#### Safety guard instruction

**Product Specifications** 

- Tripod screen should not be used in windy environment. Open the tripods completely to keep the fixed standing.
- Open the tripod completely to ensure a stable construction
- Please put the casing in vertical position after taking back the screen into the case, while still keeping the tripod totally open, or you can fold up the whole tripod and put the screen in ground or against the wall.

Model:	DMT Tripod Screen 84			
	100"			
Diagonal size: Screen size:				
ļ	211 x 160 cm (WxH)			
Viewing area:	203 x 152 cm (WxH)			
Surface:	Matt white			
Goin:	1,1			
Viewing angle:	50°			
Weight:	12 kg			
Stand and Screen Specs				
Simplicity design, rugged components and carefull workmanship.				
Heavy duty aluminium combined with steel parts, light structure, portable				
Plastic finished parts, elegant appearance				
Easy operation, stable uphold				
• In the junction of self-locking parts, adopted is the design of steel parts welded into plastic parts, which				
minimizes any scratches on the post				
The surface has the characteristic of flame retardant and mildew resistant				
• Durable enough for daily use without colour fading or deformation and it is still staying flat for optimum				
image quality				
Tripods for fixed standing				
Black aluminium tripod with fine finished, modern appearance				
Easy setup and adjustement, a pleasure to use				
Suspension slot saddle keeps the viewing surface perfectly flat				
<ul> <li>Both case and upper shaft are easily adjusta</li> </ul>	ble			
Black masking border to assure best quality v	ideo image			
More stable and sturdy aluminium legs bear cruel usage				
Built-in metal keystone eliminator extends 10" invisible when not in use				
Minimum distance:				
Minimum distance from flammable surfaces:	0,5 m			
Minimum distance to lighted object: 1 m				
;	kunnannannannannannannannannannannannanna			

Design and product specifications are subject to change without prior notice.

CE

Website: <u>www.DutchMediaTools.info</u> Email: <u>service@highlite.nl</u>





©2015 D.M.T.